


# TECHNICAL DATA SHEET

## NOYASU U40



Length	350 mm ± 4 mm
Width	345 mm ± 4 mm
Exposed Length	280 mm ± 4 mm
Exposed Width	306 mm ± 4 mm
Weight	3.06 kg / piece (36.72 kg / m <sup>2</sup> )
Pieces per SQM	12 pieces

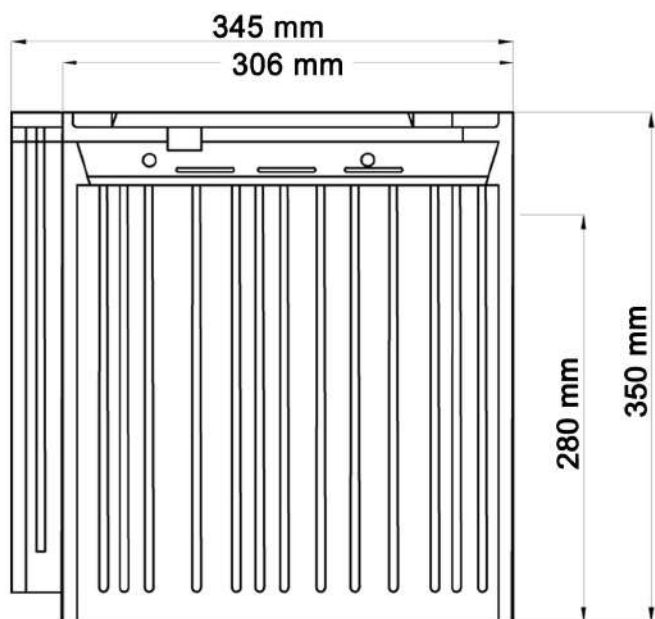

The interlocking roof tile system keeps the roof tiles secure during strong winds. It features the gut arm of the lower tile fixing onto the block

part of the lower tile. The U40 gut arm fixing method ensures water-tightness and improves performance against the harshest weather conditions.

### Wide Variety

With a wide variety of ridges and accessories, we are able to offer a diversified range of architectural aesthetics from the rustic style of Western houses to the modern or traditional design of Japanese homes. More importantly, its cutting-edge design does not sacrifice the ability to withstand harsh weather conditions. It is a flat tile that fuses aesthetic appeal with functional superiority.

### Cutting-Edge Design

The U40 roof tile features a lightly pressed bark texture and a gently squared butt. Reminiscent of weather wood shakes, the interlocking tile provides a refined yet rustic look to compliment a variety of architectural styles.

### RIDGELESS 3 PIECES SET



\* Required Slope:  
24-26 Degree

